

QUARTZ INFRARED SPOT HEATERS





HEATS SOLID OBJECTS NOT THE AIR

- 60° symmetrical heat pattern
- Quartz tube included
- GOLD anodized aluminum reflector and end caps
- 6' long - 3-wire (14/3) cordset with molded plug
- Two 2' mounting chains and 4 S-hooks included
- Interior or protected outdoor use only


MOUNTING

- Chain mount - horizontal only.
- When suspended by one hole on each end, the heater will hang at a 45° angle.
- The heater may be suspended at any angle desired.

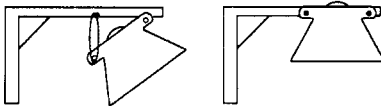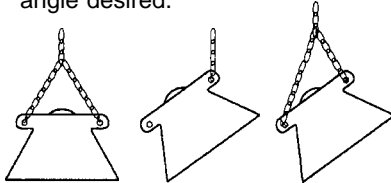

Optional vertical mount bracket: VMB-41-SS.

CH-46	CH-57
Length: 46"	Length: 57"
Width: 5 1/2"	Width: 5 1/2"
Height: 3 3/8"	Height: 3 3/8"

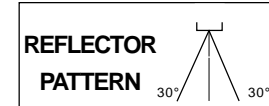

UPC 686334	MODEL	WATTS	BTU's	VOLTS	PHASE	AMPS	WT.
884020	CH-46C	1500	5120	120	1	12.5	9 lbs.
884037	CH-57C	3000	10239	240	1	12.5	11 lbs.

- Mounting Heights: CH 46C -- 7' - 9' CH 57C -- 8' - 10'
- Mounting Clearance:
 - Minimum 24" from vertical surface or combustibles.
 - Minimum 3" from ceiling
 - Mount at least 36" apart

UPC 686334	MODEL	DESCRIPTION	FOR USE WITH	WT.
804684	CHWG-46	S.S. Wire Guards	CH-46 Series Models	2 lbs.
804691	CHWG-57		CH-57 Series Models	2 lbs.
880121	HAB-1-SS	S.S. Hanging Brackets (2)	CH-46/57 Series Models	2 lbs.
881128	VMB-41-SS	Wall Mtg. Brackets (2)	CH-46/57 Series Models	12 lbs.

DIRECT WIRE QUARTZ INFRARED SPOT HEATERS




- Quartz tube heating element
- 60° Symmetric Heat Pattern
- GOLD Anodized aluminum reflector and end caps
- Two 2'ft Mounting chains and four S-Hooks included
- Interior or protected outdoor use only

MOUNTING


- Chain mount - horizontal only.
- When suspended by one hole on each end, the heater will hang at a 45° angle.
- The heater may be suspended at any angle desired.

UPC 686334	MODEL	WATTS	BTU	VOLTS	AMPS	WT.
884020	CH-46C (*)	1500	5120	120	12.5	9 lbs.
442787	CH-46-120V	1500	5120	120	12.5	
442794	CH-46-208V	2000	6826	208	9.6	
445962	CH-46-230V	1837	5768	230	7.9	
442800	CH-46-240V	2000	6826	240	8.3	
442817	CH-46-277V	2000	6826	277	7.2	
884037	CH-57C (*)	3000	10239	240	12.5	11 lbs.
442831	CH-57-208V	3000	10239	208	14.4	
445979	CH-57-230V	2755	8651	230	12.0	
442831	CH-57-240V	3000	10239	240	12.5	
442848	CH-57-277V	3000	10239	277	10.8	
445986	CH-57-400V	2290	7191	400	5.7	
442855	CH-57-480V	2250	7679	480	4.7	

(*) - Models include 6' lg., 3-wire, 14/3, cordset with molded plug.

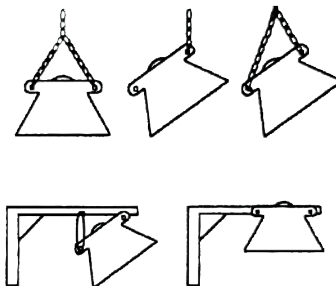

Optional vertical mount bracket: VMB-41-SS.

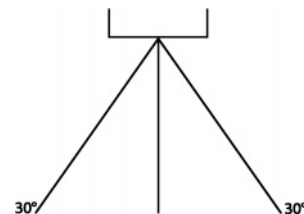

REFLECTOR PATTERN

MOUNTING CLEARANCES

- 3" from ceiling
- 12" from vertical surface
- 36" from another heater
- 24" from face of heater to combustible surface

RECOMMENDED MOUNTING HEIGHT

- CH-46 7' - 9'
- CH-57 8' - 10'

OPTIONAL ACCESSORIES:

UPC 686334	MODEL	DESCRIPTION	FOR USE WITH	WT.
804684	CHWG-46	S.S. Wire Guards	CH-46 Series Models	2 lbs.
804691	CHWG-57		CH-57 Series Models	2 lbs.
880121	HAB-1-SS	S.S. Hanging Brackets (2)	CH-46/57 Series Models	2 lbs.
881128	VMB-41-SS	Wall Mtg. Brackets (2)	CH-46/57 Series Models	12 lbs.

CH-46
Length: 46"
Width: 5-1/2"
Height: 3-3/8"

CH-57
Length: 57"
Width: 5-1/2"
Height: 3-3/8"